

## INSTALLATION INSTRUCTIONS

### NOVA VERTICAL SIDE MOUNT LICENSE PLATE HOLDER

**3190 CHROME OR 3191 GLOSS BLACK**

**THANK YOU FOR CHOOSING KURYAKYN!**

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

**⚠ WARNING** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**⚠ CAUTION** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

**NOTICE** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

#### ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- |   |   |   |                                     |
|---|---|---|-------------------------------------|
| 1 | Lighted Curved Vertical Side Mount License Plate Holder | 1 | Lighting Hardware Kit, containing:  |
| 1 | Hardware Kit, containing:                               | 4 | 4" Black Nylon Cable Ties           |
| 1 | License Plate Attachment                                | 1 | Dielectric Grease Pack              |
| 2 | 10-24 x 3/8" Hex Flat Head Screws                       | 4 | Female T-Tap Scotch Lock Connectors |
| 1 | 5/16 -18 x 1" Flange Hex Head                           | 4 | Male Connectors                     |
| 1 | Alcohol Pad   | 1 | 1" X 3" Foam Adhesive Tape          |

#### YOU WILL ALSO NEED:

Socket set, combination wrench set, hex wrench set, tin snips, test light, wire crimper

**NOTICE** THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

*Note: The lighted side mount license plate holder is compatible with any model but you must order the correct splined mount to meet your specific needs (sold separately).*


*Note: The following installation instructions assume that you have already installed the appropriate splined adapter for your specific application.*

**NOTICE** YOUR LOCAL ORDINANCES MAY HAVE SPECIFIC REQUIREMENTS ON THE APPROVED ANGLE OF THE PLATE MOUNT. BE SURE THE LICENSE PLATE IS AT THE APPROVED ANGLE AND MEETS ALL LOCAL ORDINANCES.

**⚠ WARNING** THE ADDITION OF A SIDE-MOUNTED LICENSE PLATE MAY AFFECT CORNERING CLEARANCE IN SOME SITUATIONS.

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.

**STEP 2** Refer to PIC 1. Locate the License Plate Holder. Remove the back plate from the license plate frame.

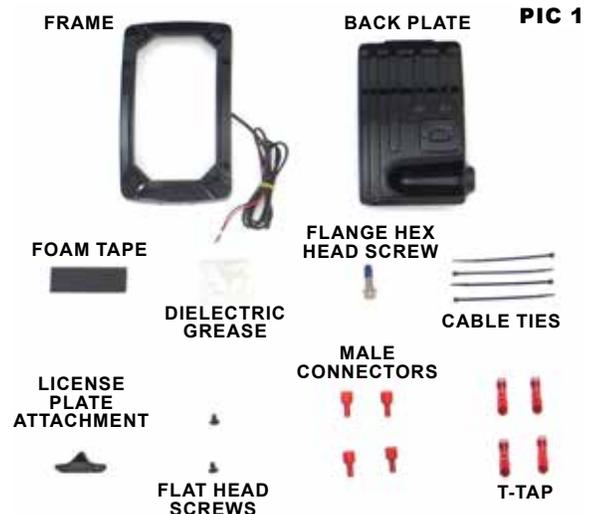

## INSTALLATION INSTRUCTIONS

### NOVA VERTICAL SIDE MOUNT LICENSE PLATE HOLDER

-CONTINUED-

- STEP 3** Refer to PIC 2. Place the splined section of the back plate over the splined adapter; adjust the angle of the back plate and secure it with the supplied 5/16 -18 x 1" Flange Hex Head. Place the license plate frame onto the black plate to confirm desired position of the assembly. Remove the license plate frame from the black plate and fully tighten the screw; ensuring that the splines on the mount mesh properly with the splines on the backing plate.

*Note: Be sure the plate assembly does not interfere with the shock absorber or other components on the motorcycle and that there is sufficient clearance for the passenger foot peg.*

- STEP 4** Refer to PIC 3. Feed the wires of the license plate frame through the hole located by the spline mount of the back plate.

- STEP 5** Refer to PIC 4. Install your license plate into the assembly. You may need to trim your plate with tin snips for a perfect fit and for wire harness clearance between the license plate frame and back plate.

- STEP 6** Place the license plate and frame assembly over the back plate, be sure the tab of the back plate is seated into the notch of the frame.

- STEP 7** Refer to PIC 5 and 6. Locate two (2) Flat Head Screws and the License Plate Attachment. Align the mounting holes of the back plate, frame and license plate attachment. Secure it in place with the two flat head screws. Fully tighten hardware.

- STEP 8** Locate the main wiring harness running to the rear fender. Use a test light, or refer to the factory service manual to identify which wire performs the run function of the taillight and which wire is the ground wire. Mark these wires for reference.

- STEP 9** Route the plate assembly wiring harness to the stock wiring harness. Keep the wiring harness clear of moving parts and high temperature parts (belt, wheel, swing arm pivot, etc.).

**NOTICE**

**SECURE ALL WIRING AWAY FROM ANY MOVING PARTS, PINCH POINTS OR EXTREME HEAT. KURYAKYN WILL NOT ISSUE A WARRANTY ON ANY ELECTRICAL COMPONENT THAT FAILS DUE TO PINCHED, CRIMPED, BROKEN, ABRADED, MELTED OR FRAYED WIRES.**

**CAUTION**

**AVOID POTENTIAL ELECTRICAL SHOCK! DISCONNECT THE BATTERY BEFORE STARTING THIS PROCEDURE.**

**NOTICE**

**KURYAKYN RECOMMENDS THE USE OF DIELECTRIC GREASE ON ELECTRICAL CONNECTIONS.**



**PIC 2**



**PIC 3**



**PIC 4**



**PIC 5**



**PIC 6**

OFF BIKE VIEW



## INSTALLATION INSTRUCTIONS

### NOVA VERTICAL SIDE MOUNT LICENSE PLATE HOLDER

-CONTINUED-

**STEP 10** Refer to FIG 1 below to make the correct electrical connections.

Refer to PIC 7, 8, and 9. Install one of the supplied Female T-Taps to the running light wire determined in Step 7. Install one of the supplied Male connectors to the RED wire from the Plate light. Plug the Male Connector into the Female T-Tap.


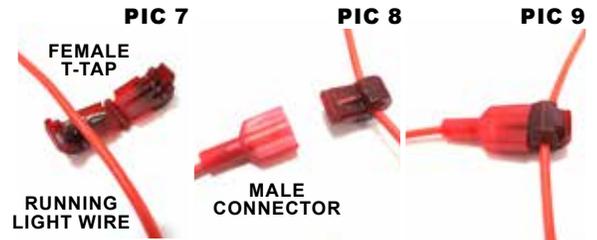


FIG 1

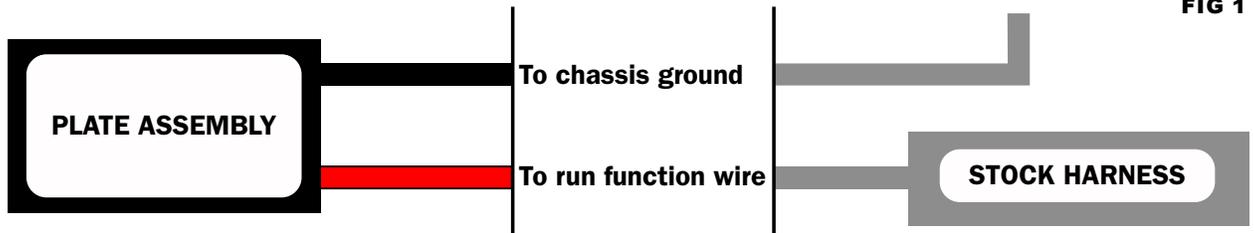

**STEP 11** Install one of the supplied Female T-Taps to the ground wire determined in Step 8. Install one of the supplied Male connectors to the BLACK wire from the Plate light. Plug the Male Connector into the Female T-Tap.

**STEP 12** Secure the plate assembly wiring harness using the supplied cable ties. Reconnect the battery cables and test the license plate assembly and taillight for proper function.

*Note: If the license plate rattles in the frame, install the supplied self-adhesive tape to the inside of the back plate then re-install the license plate. This should eliminate the rattle.*

**WARNING** ENSURE PROPER LIGHT OPERATION BEFORE RIDING THE MOTORCYCLE. VISIBILITY IS A MAJOR CONCERN FOR MOTORCYCLISTS. A LIGHT MALFUNCTION COULD RESULT IN DEATH OR SERIOUS INJURY.

**NOTICE** IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.



FINAL



## INSTALLATION INSTRUCTIONS

### NOVA VERTICAL SIDE MOUNT LICENSE PLATE HOLDER

-CONTINUED-

#### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

#### RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice).

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice)