

INSTALLATION INSTRUCTIONS

FIXED MOUNTS FOR MULTI-PURPOSE BACKREST, FOR TOURING

1662

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- | | | | |
|---|--------------------------------|---|--------------------------------------|
| 1 | Left Fixed Mount (clutch side) | 4 | 0.69" OD X 0.065" Flat Washers |
| 1 | Right Fixed Mount (brake side) | 4 | 5/16"-18 X 1" Socket Head Cap Screws |

YOU WILL ALSO NEED:

Torx wrench set, hex bit socket set and ratchet, ft-lbs torque wrench

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.



BIKE AND HARDWARE PREP

STEP 2 Remove both saddlebags from the bike; set them on a soft sturdy surface for now.

STEP 3 Put the included Flat Washers on the included 5/16" Screws; set them within arms reach of the work area.

STEP 4 Refer to PICS 1 and 2. Determine the left Fixed Mount from the right; set them within arms reach of the work area.

STEP 5 Refer to PIC 3. On the clutch-side (left) saddlebag support, locate and remove the two Torx screws; lift the insert out of the slot; set the screws and insert aside, they will not be reused. Repeat for the brake-side (right).

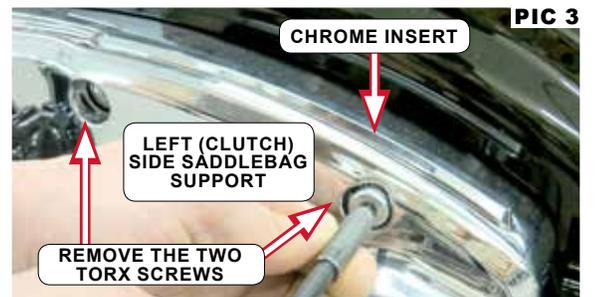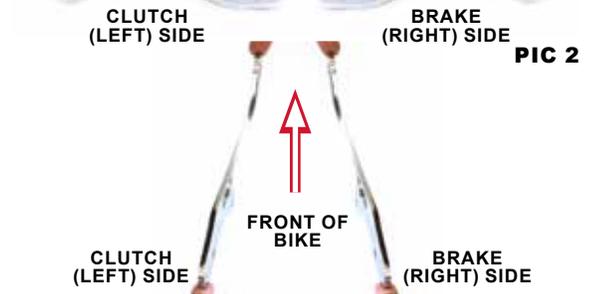

INSTALLATION INSTRUCTIONS

FIXED MOUNTS FOR MULTI-PURPOSE BACKREST, FOR TOURING

1662

-CONTINUED-

FIXED MOUNTS INSTALLATION

STEP 6 Refer to PIC 4. Insert the rear of the clutch-side (left) Fixed Mount in the slot (1); slide the front end down into the slot (2); align the holes and secure it to the bike with two of the Screws and Washers from STEP 3. Leave the screws loose for now.

STEP 7 Repeat STEP 5 for the brake-side (right).


STEP 8 Locate the 5/16"-18 X 7/8" Countersunk Socket Head Screws and Shoulder Washers (included in the Multi-Purpose Backrest kit); put the washers on the Countersunk screws; set them within arms reach of the work area.

STEP 9 Refer to PIC 5. Ensure that the locking levers on the Multi Purpose Backrest are in the unlocked position; hold the Backrest between the Fixed Mounts and align the mounting holes.


STEP 10 Secure the Backrest to the Mounts with the Screws and Shoulder Washers from STEP 8. Ensure the Shoulder Washer fits flush against the Fixed Mounts; start the screws in the threaded holes. Leave the screws loose until both have been started in their threads. Flip the locking levers to the locked position; pivot the Backrest until the pins settle in their slots (you will hear a "click"). Torque both of the Countersunk Socket Head Screws to 15 ft-lbs (20.3 Nm).

NOTE: If the 5/16"-18 X 7/8" Countersunk Socket Head Screws are loosened or removed, see the WARNING below.

STEP 11 Torque the four 5/16" Fixed Mount screws to 20 ft-lbs (27.1 Nm). Reinstall both of the saddlebags.

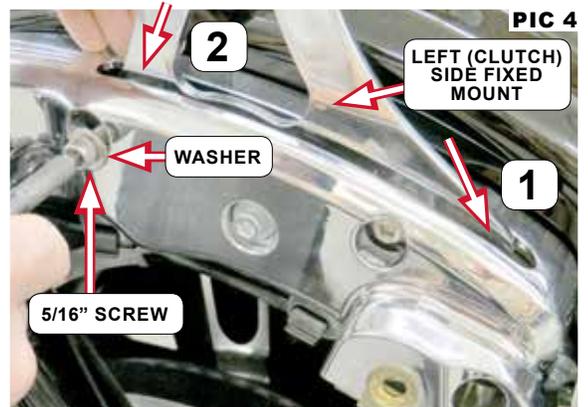

PIC 4

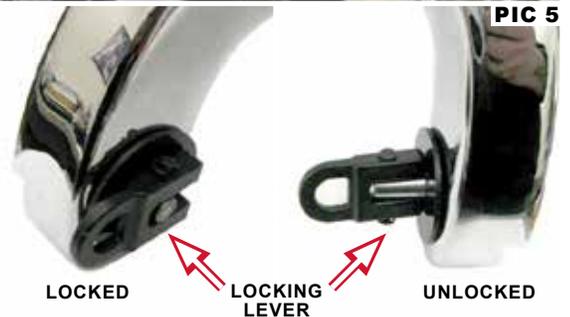

PIC 5



PIC 6

WARNING

BOTH PIVOT/HINGE SCREWS MUST HAVE THREADLOCK COMPOUND REAPPLIED AND MUST BE RE-TORQUED IF REMOVED AFTER INITIAL INSTALLATION. FAILURE TO DO SO MAY RESULT IN UNINTENDED LOOSENING AND MAY CAUSE SERIOUS INJURY OR DEATH. THE FEMALE THREADS IN THE MULTI-PURPOSE BACKREST AND THE THREADS ON THE REMOVED SCREWS WILL NEED TO BE CLEANED TO REMOVE ANY THREADLOCKER RESIDUE BEFORE RE-INSERTING. RE-APPLY LOCTITE® THREADLOCKER BLUE 242® OR EQUIVALENT, AS SHOWN IN PIC 6, RE-TORQUING TO 15 FT-LBS (20.3 NM) USING A TORQUE WRENCH AND 3/16" ALLEN/HEX KEY ATTACHMENT. LET CURE PER THE THREADLOCK MANUFACTURERS INSTRUCTIONS AFTER INSTALLATION. IF YOU DO NOT WISH TO APPLY THREADLOCKER, THEN ORDER A NEW SERVICE KIT, (P/N 991660) WHICH WILL CONTAIN SCREWS WITH BLUE THREADLOCK ADHESIVE PRE-APPLIED.

INSTALLATION INSTRUCTIONS

FIXED MOUNTS FOR MULTI-PURPOSE BACKREST, FOR TOURING

1662

-CONTINUED-

PRE-RIDE INSPECTION

Fold the locking levers outward to the unlocked position; move the Backrest to the desired position; fold the locking levers to the locked position; gently pivot the Backrest until the locking pins settle in their notches (you will hear a “click”).

Repeat the above procedure for the other Backrest position.

Visually inspect the Shoulder Washers and Countersunk Socket Head Screws at the pivot point for any signs of loosening before each ride. Kuryakyn requires confirmation of correct torque specifications, as defined in these instructions, of all backrest-attaching-fasteners every 3,000 to 5,000 miles.

NOTE: Refer to the instructions for the Multi-Purpose Driver/Passenger Backrest (P/N 1660 or P/N 1661) for detailed adjustment procedures.

WARNING

THIS BACKREST IS NOT DESIGNED AS A SAFETY RESTRAINING DEVICE. FAILURE TO HOLD ONTO THE MOTORCYCLE MAY RESULT IN SERIOUS INJURY OR DEATH.

CAUTION

ENSURE THAT THE INSTALLATION OF THIS PRODUCT DOES NOT INTERFERE WITH THE PROPER OPERATION OF THE MOTORCYCLE BEFORE RIDING.

NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

INSTALLATION INSTRUCTIONS

FIXED MOUNTS FOR MULTI-PURPOSE BACKREST, FOR TOURING

1662

-CONTINUED-

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice