



INSTALLATION

CURVED LICENSE PLATE FRAME

3162

PARTS INCLUDED

- 1 License Plate Frame Assembly
- 1 Hardware Kit Containing:
 - 2 Adhesive Foam Pads
 - 4 1/4"-20 x 7/16" Flat Socket Cap Screws
 - 2 1/4"-20 x 1/2" Button Socket Cap Screws
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

TOOLS SUGGESTED


Set of Hex Wrenches, Set of Combination Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

CAUTION! Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

STEP 2 Remove the light bar from the rear fender; the fasteners are under the fender. PIC 1 Save the fasteners, they will be reused.

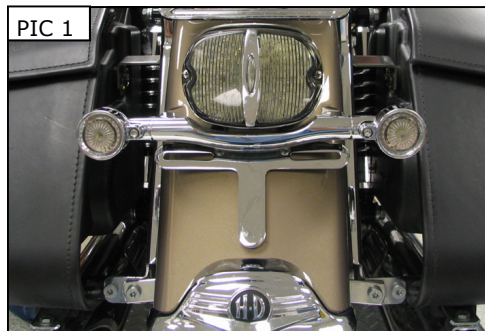

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.




-cont.-

3162-23HD-0312


kuryakyn.com

STEP 3 Remove the license plate bracket from the light bar. PIC 2

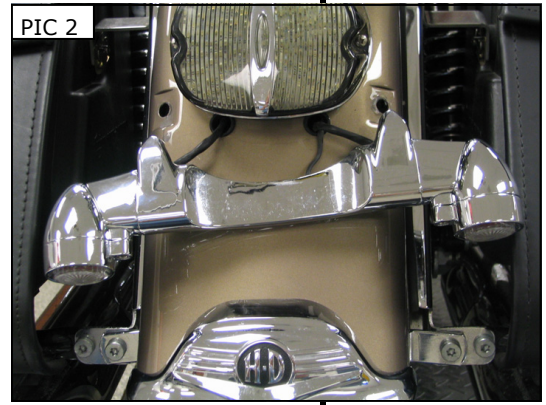


STEP 4 Install your license plate in the new bracket. The frame has a notch to fit over the mounting ears of the back plate. Be sure the notch faces the top of the back plate. PIC 3 Fasten the frame to the back plate with the supplied 1/4"-20 X 7/16" fasteners.

NOTE: Gently mold your license plate to the same bend as the back plate. Install the license plate frame over your plate. Getting all four supplied fasteners started first before tightening will work better than tightening up one at a time. Some modification may be required on some motorcycle license plates for correct fitment/alignment.

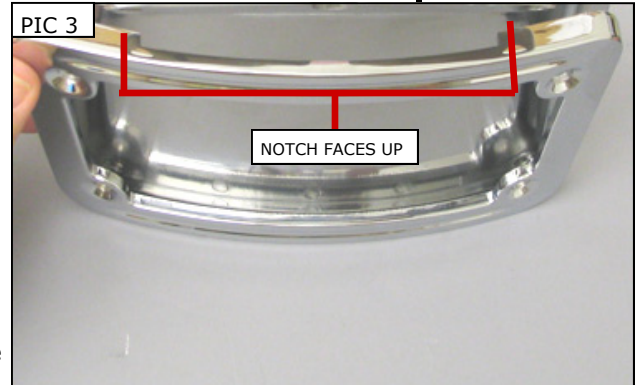

STEP 5 Fasten the license plate bracket to the light bar with the supplied 1/4"-20 X 1/2" fasteners.

STEP 6 Hold the Light Bar/ Plate Assembly up to the fender and measure the distance between the bottom back of the Curved License Plate Frame and the fender. PIC 4 If the distance is 1/4" or less install one of the included adhesive foam pads. Remove the adhesive backing and adhere the foam directly to the fender. If the distance is greater than a 1/4", you will need to install both pads. Adhere one directly to the fender and one in the same location on the backside of the Back Plate.

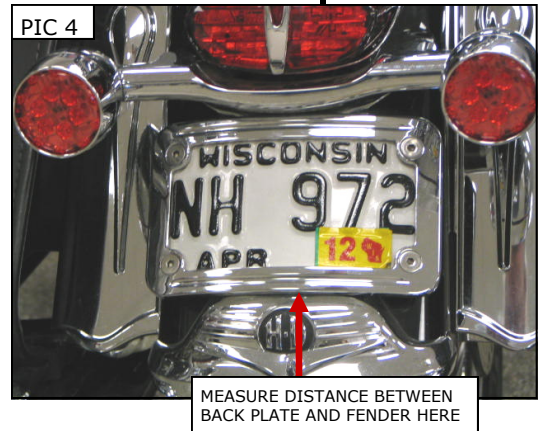

CAUTION! It is the installer's responsibility to ensure that there is adequate clearance between the License Plate Mount and any painted surfaces. Küryakyn is not responsible for any damage due to inadequate clearance.

STEP 7 Install the light bar on the rear fender using the existing hardware. PIC 4

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including preassembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

Ride On!