

CRUSHER MAVERICK PRO AIR CLEANER, SATIN BLACK

9896

THANK YOU FOR CHOOSING CRUSHER!

PROTECT YOURSELF AND OTHERS FROM POTENTIAL INJURY AND PROPERTY DAMAGE OR LOSS. PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS, AND NOTICES REGARDING THE INSTALLATION, USE, AND CARE OF THIS PRODUCT.

⚠ WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

THIS PRODUCT IS NOT LEGAL FOR SALE OR USE ON POLLUTION CONTROLLED VEHICLES.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Breather Manifold
- 1 Backer
- 1 Weldment
- 1 Filter Element
- 1 Outer Cover
- 1 Filter Cover
- 1 Hardware Kit containing:
 - 2 Breather Bolts
 - 2 O-rings
 - 3 ¼"-20 X 1-3/4" Socket Head Cap Screws
 - 1 Gasket, Backer to Breather
 - 1 10-24 X ¾" Flat Socket Cap Screws
 - 2 10-32 X 3/8" Custom Button Head Screw
 - 1 Crusher Badge
 - 1 08-Up Gasket
 - 1 Late Style Gasket
 - 6 Sealing Washers

YOU WILL ALSO NEED:

Set of hex bits or wrenches, socket set and ratchet, set combination wrenches, Torx bits or wrenches

NOTICE

These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future use.

- STEP 1** Read and understand all **STEPS** in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn **IGN OFF**. Allow the engine and exhaust system to cool. Remove the main fuse.

⚠ WARNING

THE END USER'S SAFETY DEPENDS UPON PROPER INSTALLATION OF THIS PRODUCT. IF A STEP IN THESE INSTRUCTIONS IS NOT WITHIN YOUR CAPABILITIES OR YOU DO NOT HAVE THE CORRECT TOOLS, HAVE YOUR DEALER PERFORM THE PROCEDURE. IMPROPER INSTALLATION OF THIS PRODUCT COULD RESULT IN DEATH OR SERIOUS INJURY.

ACCIDENTAL VEHICLE START-UP COULD CAUSE DEATH OR SERIOUS INJURY, REMOVE THE MAIN FUSE BEFORE PROCEEDING.

INSTALLATION REQUIRES CONTACT WITH THE ENGINE AND EXHAUST SYSTEM; ENSURE THAT THEY HAVE FULLY COOLED BEFORE BEGINNING TO PREVENT INJURY.

STEP 2 STEP 2 Refer to PIC 1. Remove the existing air cleaner, filter, breather bolts and breather assembly, backing plate, and gasket. Ensure that the intake flange is clean and dry.

STEP 3 Locate the included Breather Manifold, Breather Bolts, O-rings, and Sealing Washers; set it all on a clean, sturdy work surface.

STEP 4 Press the O-rings into place on the Manifold as shown in PIC 2.

Insert one of the Breather Bolts through the Manifold as shown in PIC 2; ensure the Bolt captures the O-ring.

STEP 5 Refer to PIC 3. Place one of the Sealing Washers over the end of the Bolt.


Repeat for the other side.

STEP 6 Refer to PIC 4 and 5. Align the Late-Style Gasket with the Breather Manifold; secure the Breather Manifold assembly to the cylinder heads with the Breather Bolts; ensure the O-rings and Gasket remain in place.

Determine if additional Rubber Coated Washers are necessary to take up any remaining space between the breather legs and cylinder heads. If none are necessary skip to STEP 7.

Carefully remove the Breather Bolts; add Washers as required.

Again, ensure that the O-Rings and Gasket remain in place; tighten the Breather Bolts.

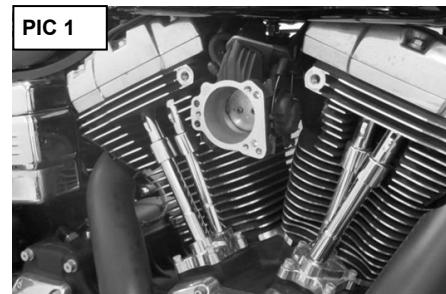


PIC 1



PIC 2

PRESS O-RINGS INTO PLACE

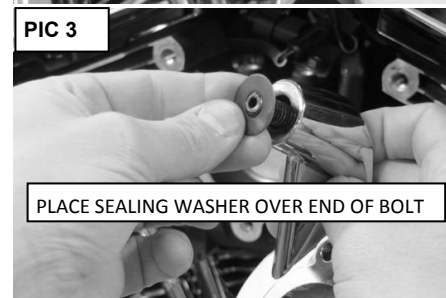


PIC 3

PLACE SEALING WASHER OVER END OF BOLT



PIC 4


ALIGN LATE-STYLE GASKET WITH BREATHER MANIFOLD

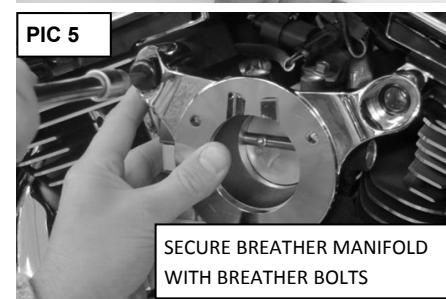


PIC 5

SECURE BREATHER MANIFOLD WITH BREATHER BOLTS

STEP 7 Locate the included 1/4"-20 Screws, Weldment, Backer, and "Backer to Breather" Gasket; assemble the Weldment, Backer, and Screws as shown in PIC 6.

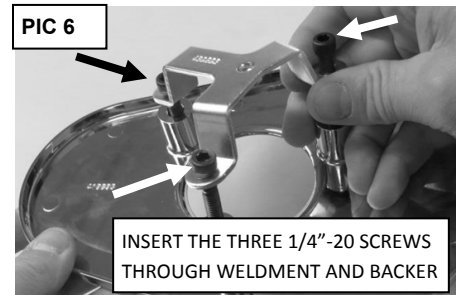

STEP 8 Align the Gasket with the Screws protruding from the Backer as shown in PIC 7.

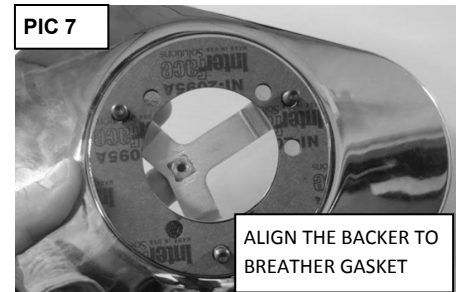

STEP 9 Secure the Backer assembly to the Breather Manifold with the three screws as shown in PIC 8. Ensure the Gasket remains in place while tightening the screws.



STEP 10 Refer to PIC 9. Locate the included Filter Cover and Outer Cover; CAREFULLY slide the Filter Cover into the Outer Cover; the flange will capture the Filter Element when it is installed.



STEP 11 Locate the included Filter Element; slide it into the Cover assembly as shown in PIC 10. Ensure that the Filter Cover captures the Filter edges completely.



STEP 12 Refer to PIC 11. Position the Cover assembly over the Backer; as the assembly is being aligned, ensure that the inside edge of the Filter fits inside the Backer flange.



STEP 13 Refer to PIC 12. Align the Cover and Weldment; secure with the included 10-24 Flat Socket Cap Screw; do not over tighten!



STEP 14 Refer to PIC 13. Locate the included Crusher Badge and two (2) 10-24 Custom Button Head Screws; align the Badge on the Cover and secure with the two screws. Do not over tighten the screws!



STEP 15 Reinstall the main fuse.

NOTICE

It is the end user's responsibility to ensure that all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

NOTICE

Follow K&N recommendations for proper use and cleaning of the air filter element. K&N Filter Care Kit (p/n 85 available at kuryakyn.com)

Proper tuning is important. Carbureted bikes should be re-jetted and fuel injected bikes should be tuned with a TTS MasterTune tuning system (calibrations available at www.kuryakyn.com) or Vance & Hines FP3 (calibrations available at <http://fp3.vanceandhines.com/download>) by an experienced tuner, on a dyno, with an exhaust gas analyzer.

LIMITED WARRANTY

Küryakyn warrants that any Crusher products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product/s.
2. The product must be properly installed, maintained & operated under normal conditions.
3. Küryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn & a customer.
4. Crusher products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
5. Crusher electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Küryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase where as all other components shall be warranted for one (1) year.
6. Exhaust systems are warranted for manufacturing defects only. There is no warranty on exhaust pipes & mufflers with regard to any discoloration. Discoloration or "bluing" is caused by tuning characteristics, exhaust timing, carburetor jetting, overheating, etc. & is not caused by defective manufacturing.
7. Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer & where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.
8. Merchandise purchased directly from Internet auction sites or any other third party seller is considered sold as is & shall not carry a Küryakyn warranty. All warranty claims must be directed to the original seller. If unsure please contact the seller to verify they are an authorized Küryakyn retailer.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

RETURN INSTRUCTIONS

Contact one of our prompt, courteous Customer Service representatives toll free at 866-295-5759. Be sure to have the following information available when you call:

- Name
- Part number/s to be returned
- Copy of original invoice
- Reason for return

1. Obtain R.M.A. number which shall remain active & valid for 60 days. (Important: Issuance of R.M.A. does not represent an authorized credit.)
2. Carefully package merchandise to avoid damage during shipment. Depending on its condition, original packaging may not be sufficient.
3. Ship only those items for which the R.M.A. has been issued.
4. Write the R.M.A. number prominently on the outside of package.
5. Ship package freight PREPAID (C.O.D.s will not be accepted) to:
Kuryakyn 454 County Road V V Somerset, WI 54025