



Mounting Suggestions Honda Valkyrie 1997-2003 Two-Piece Seat

(For Valkyrie Interstate 1999-2001, please see next page)



Baseplate Features:

The two-piece, marine-grade fiberglass baseplate is a direct replacement for the stock one-piece seat. Rubber bumpers are strategically placed to prevent the seat from touching the frame and fender.

Stock Seat Removal Steps

1. Unlock solo with the ignition key.
2. Pull nose of solo up and slide forward to remove.
3. Remove two 5 mm Allen bolts in the front of passenger seat and one 8 mm Allen bolt at the rear of passenger seat.
4. Remove passenger seat.

Note: When passenger seat is removed, fender will have no brackets.

Mounting of Mustang Seat

1. Passenger seat is mounted first. Secure with one stock 8 mm bolt in rear and two stock 5 mm bolts in front.
2. Solo is mounted by engaging rear tab into fender mount and locking front latch.

Note: If solo seat does not line up with the front latch, the rear tab is not properly engaged. The skirt on the solo seat must not be bent under seat.



Enjoy the Comfort of your new Mustang Seat!

These steps are guidelines to help you install your new Mustang product. If you need further assistance, please call us at 800-243-1392, Monday through Friday 9:00 - 5:30 Eastern, or send an email to questions@mustangseats.com, or visit our website at www.mustangseats.com.

For care and maintenance of our seats, please go to our website under "Support".

Ref part #75970, 75972, 79140, 79141




Mounting Suggestions Honda Valkyrie Interstate 1999-2001 Two-Piece Seat

(For Valkyrie 1997-2003, please see previous page)

Hardware

- Two 6 mm Allen Bolts, Mustang Part #78042 (Required, are included at no charge with an Interstate seat order upon your specific request)

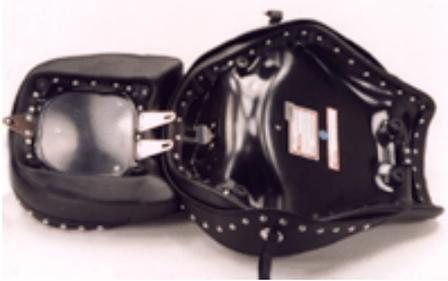

Baseplate Features:

The two-piece, marine-grade fiberglass baseplate is a direct replacement for the stock one-piece seat. Rubber bumpers are strategically placed to prevent the seat from touching the frame and fender.

Stock Seat Removal Steps

1. Unlock and pull the nose of the seat up.
2. Slide entire seat forward.

Mounting of Mustang Seat

Note: The two weld nuts under fender are covered with 0.5" round stickers. Remove the stickers before fastening the rear seat.

1. Attach the rear of the passenger seat to fender just above the taillight, using the stock 6 mm Allen bolt. It may be necessary to lift up the rear of the fender to properly engage the 6 mm bolt. The front of the seat is secured to the fender using the two (supplied) 6 mm Allen bolts.
2. Slide rear of solo into receiver on fender, push nose down into key latch mechanism.

Enjoy the Comfort of your new Mustang Seat!



These steps are guidelines to help you install your new Mustang product. If you need further assistance, please call us at 800-243-1392, Monday through Friday 9:00 - 5:30 Eastern, or send an email to questions@mustangseats.com, or visit our website at www.mustangseats.com.

For care and maintenance of our seats, please go to our website under "Support".

Ref part #75970, 75972, 79140, 79141